




Long Life · Stainless Steel

No one knows hot water like...







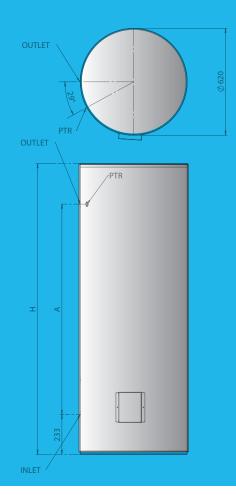

## **qudos**™

# **Electric & Solar Storage**Mains Pressure Stainless Steel

Model	MPE160	MPE250	MPE315
Delivery (L)	160L	250L	315L
PTR Setting	850kPa	850kPa	850kPa
Maximum Supply Pressure	750kPa	750kPa	750kPa
Approx. Weight Empty	30kg	50kg	80kg
Max. Temperature	80°C	80°C	80°C
Voltage	240V	240V	240V
Elements	1x3.6kW	1 x 3.6kW	1x3.6kW
Rec. Temperature	70°C	70°C	70°C
Dimension (H) mm	1190	1690	2015
Dimension (A) mm	707	1222	1550
Diameter mm	620	620	620

### qudos<sup>™</sup> Design Data

- 315, 250 & 160 Litre
- MEPS Compliant
- · Adjustable contact thermostat with over-temperature cut out
- 10 year warranty\*
- Outer Casing Dune Colorbond®



#### Calorifier Finned Tube **Heating Coils**

These highly efficient heat exchange coils are ideal for heating domestic hot water from renewable energy or waste heat sources. The finned tube heat exchange coil is designed to deliver as much energy as possible into the tank.

- High thermal performance output
- Compact design
- Various kW ratings available
- Multiple coils per vesse
- Ready-to-install by Table 'E' flange




#### qudos™ PRO

## **Heavy Duty**Mains Pressure Stainless Steel

Model	MPS400	MPS500	MPS600
Delivery (L)	400	500	600
PTR Setting	700kPa	700kPa	700kPa
Maximum Supply Pressure	500kPa	500kPa	500kPa
Approx. Weight Empty	100kg	120kg	140kg
Dimension (H) mm	1485	1770	2085
Dimension (A) mm	610	896	1210
Diameter mm	790	790	790





Standard fittings - 2 x 50mm BSP and 1 x 25mm BSP sockets N1, N2, N7. Other fittings and positions POA.

### **qudos**™ Design **Data**

- 600, 500 & 400 Litre
- Electric elements available
- 790mm diameter doorway width
- 10 year warranty\*
- Outer Casing Dune Colorbond®







Long Life · Stainless Steel

No one knows hot water like...

FREE CALL
1800 302 050
sales@wilsonhotwater.com.au
www.wilsonhotwater.com.au

